




Wiring Configuration


La Configuración del alambrado, La Configuración del alambrado, Verdrahtende Konfiguration

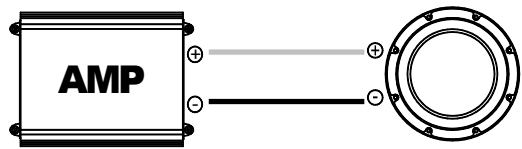

Wired Direct (Alambró Directo, Télégraphié Direct, Direkt hat verdrahtet):

A 4Ω speaker will represent a 4Ω load.


(Un orador 4Ω representará una carga 4Ω, Un 4Ω haut-parleur représentera un 4Ω chagent, Ein 4Ω Sprecher beladen eine 4Ω wird vertreten)

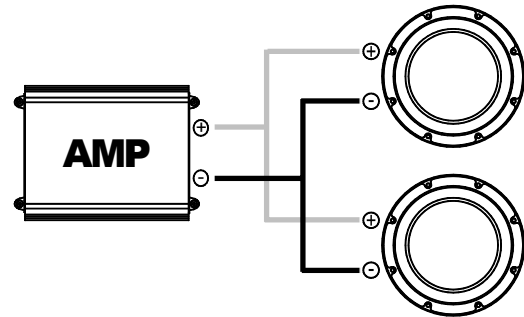

Two Speakers wired in parallel (Dos Oradores alambraron en la paralela, Deux Haut-parleurs ont télégraphié dans l'analogie, Zwei Sprecher haben parallel verdrahtet):

A 4Ω speaker will represent a 2Ω load.


(Un orador 4Ω representará una carga 2Ω, Un 4Ω haut-parleur représentera un 2Ω chagent, Ein 4Ω Sprecher beladen eine 2Ω wird vertreten)

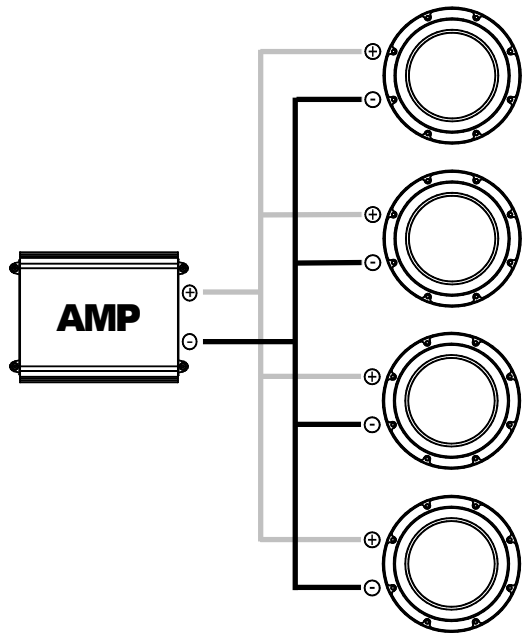

Four Speakers wired in parallel (Cuatro Oradores alambraron en la paralela, Quatre Haut-parleurs ont télégraphié dans l'analogie, Vier Sprecher haben parallel verdrahtet):

A 4Ω speaker will represent a 1Ω load.

(Un orador 4Ω representará una carga 1Ω, Un 4Ω haut-parleur représentera un 1Ω chagent, Ein 4Ω Sprecher beladen eine 1Ω wird vertreten)

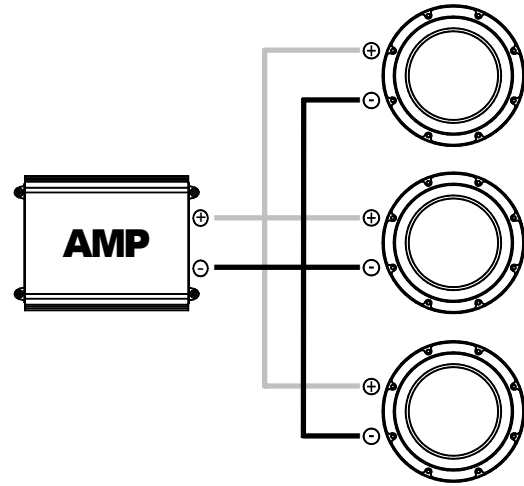

Three Speakers wired in parallel (Tres Oradores alambraron en la paralela, Trois Haut-parleurs ont télégraphié dans l'analogie, Drei Sprecher haben parallel verdrahtet):

A 4Ω speaker will represent a 1.3Ω load.

(Un orador 4Ω representará una carga 1.3Ω, Un 4Ω haut-parleur représentera un 1.3Ω chagent, Ein 4Ω Sprecher beladen eine 1.3Ω wird vertreten)



XTANT products purchased in the USA from an authorized XTANT dealer are guaranteed against defects in material and workmanship for a period of 1 year, the warranty period begins the day the product is purchased by the end user. This warranty is limited to the original retail purchaser of product. Product found to be defective during that period will be repaired or replaced by XTANT at no charge. This warranty is void if it is determined that unauthorized parties have attempted repairs or alterations of any nature. Warranty does not extend to cosmetics or finish. Before presuming a defect is present in the product, be certain that all related equipment and wiring is functioning properly. XTANT disclaims any liability for other incurred damages resulting from product defects. Any expenses in the removal or reinstallation of products are not covered by this warranty. XTANT's total liability will not exceed the purchase price of the product. If a defect is present, your authorized XTANT dealer may be able to effect repairs.


Proof of purchase is required when requesting service. so please retain your sales receipt, and take a moment to register your product on line at XTANT.com. Also, a Return Authorization number (RA) is required before shipping product back to XTANT, call 800-556-2888 or 608-325-5560 for speaker RA's.



Parameters



Los parámetros, Paramètres, Parameter

F_s: 31.00 Hz
Q_{ms}: 9.51
C_{ms}: 0.091 mm/N
M_{ms}: 287.00 g
R_{ms}: 5.91 kg/s
V_{as}: 1.483 ft³ (41.78 liters)
Encl. Displ.: 0.171ft³ (4.8 liters)
X_{max}: 0.600 in (15.20 mm)
D: 10.640 in (270.26 mm)
S_d: 88.86 in² (573.3 cm²)
V_d: 53.32 in³ (.873 liters)
Q_{es}: .760
R_e: 0.97 Ω
B_l: 08.44 Tm
P_{rms}: 600 Watts
Q_{ts}: 0.704
η_o: 0.160 %
SPL_o: 85.00 dB
SPL 2.83V/1m: 94.20 dB

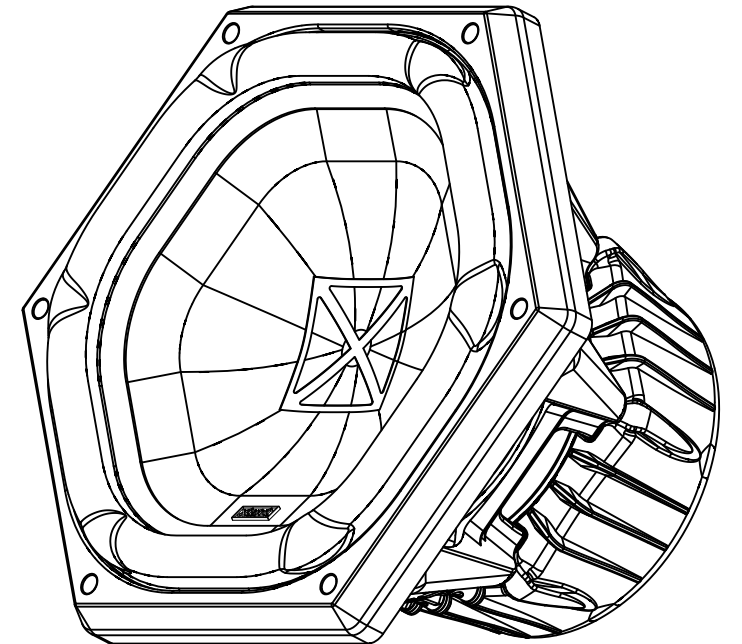

Specifications

Las especificaciones, Spécifications, Spezifikationen

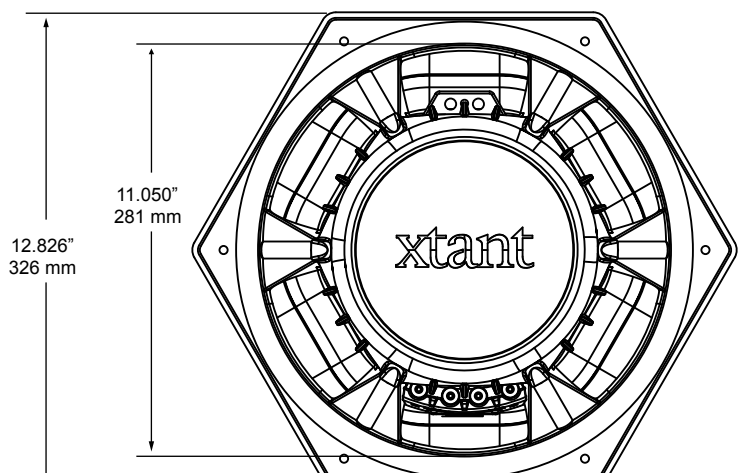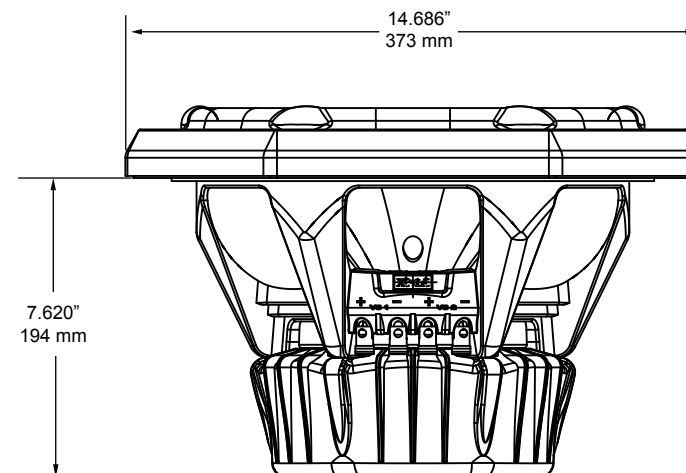

Recommended Power Rating of 300 - 600 Watts RMS

La Potencia nominal recomendada, Le Pouvoir recommandé Evaluant, Empfohlene Kraft Einzuschätze



WARNING: Prolonged exposure to high sound levels can lead to permanent hearing loss. In addition, drastically over-powering the speakers can result in extreme heat which could cause a fire. For your own safety and enjoyment, please follow the manufacturer's power handling recommendations.



Sealed Enclosure

El Cerco sellado, Clôture scellée, Abgedichtete Einschließung


For the best possible sound quality where space is a premium, XTANT recommends using a sealed enclosure. For excellent sound quality with increased output compared to sealed enclosures (3dB or more), XTANT recommends using a vented enclosure. All recommended enclosures have been designed and thoroughly tested by XTANT.

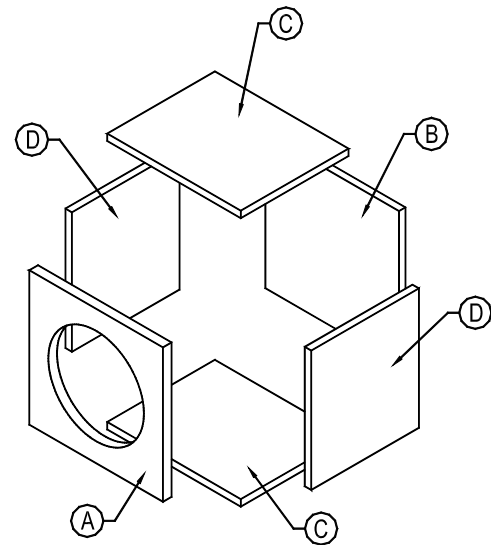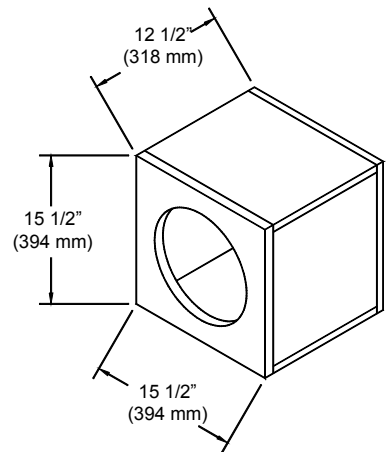


Net Internal Volume: 1.25 ft³

Parts List


La Lista de partes, Liste de parties, Ersatzteilliste

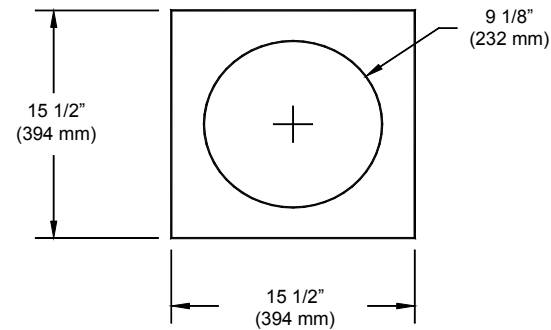


[A] – 3/4" (19mm) MDF

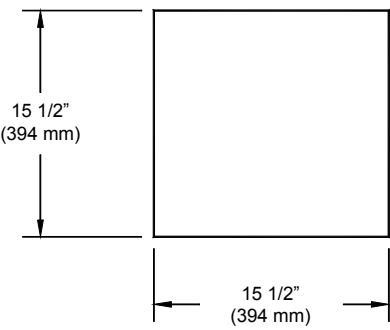

[B] - 3/4" (19mm) MDF

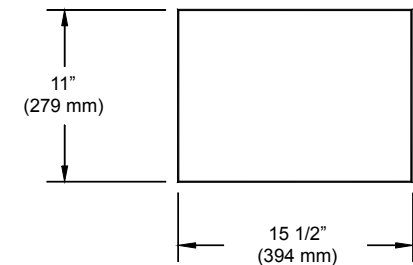

[C] - 3/4" (19mm) MDF

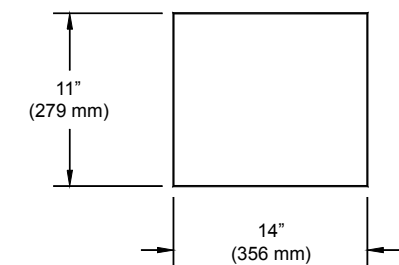



[D] - 3/4" (19mm) MDF



Vented Enclosure

Descargar Cerco, Clôture donnere vent, Vented Einschließung


For the best possible sound quality where space is a premium, XTANT recommends using a sealed enclosure. For excellent sound quality with increased output compared to sealed enclosures (3dB or more), XTANT recommends using a vented enclosure. All recommended enclosures have been designed and thoroughly tested by XTANT.

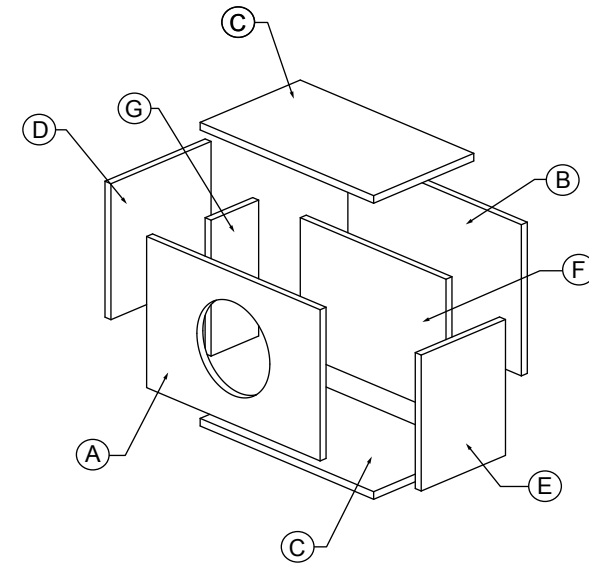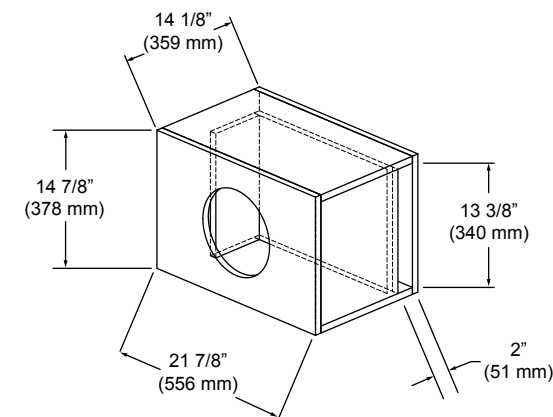


Net Internal Volume: 2.00 ft³

Parts List


La Lista de partes, Liste de parties, Ersatzteilliste

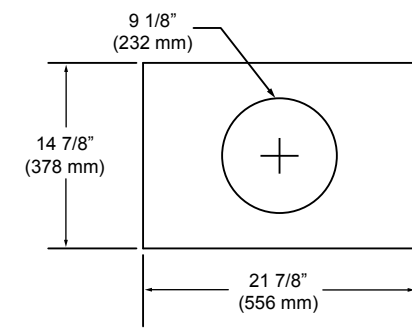


[A] – 3/4" (19mm) MDF

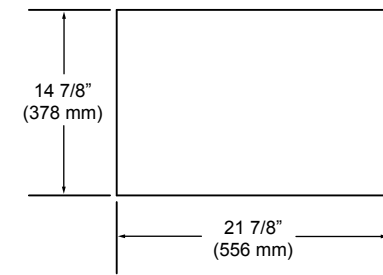


[B] - 3/4" (19mm) MDF

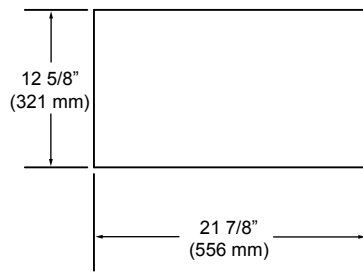


[C] - 3/4" (19mm) MDF




[D] - 3/4" (19mm) MDF



[E] - 3/4" (19mm) MDF

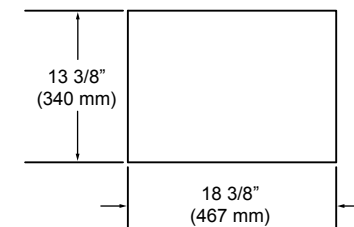

[F] - 3/4" (19mm) MDF



[G] - 3/4" (19mm) MDF