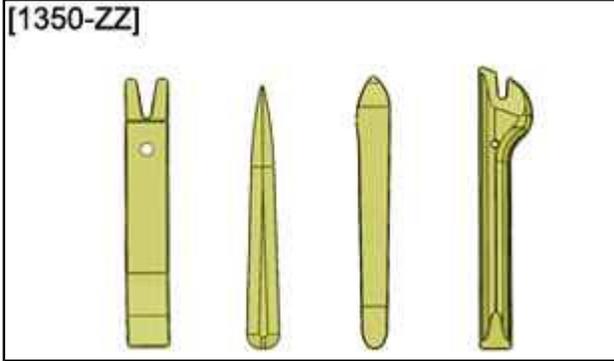


REMOVING - REFITTING : CENTRAL CONSOLE (/)

URGENT : Observe the safety and cleanliness recommendations ⓘ .

1. Tooling

tool	Reference	Description
<p>[1350-ZZ]</p>  <p>Figure : E5AG02MT</p>	[1350-ZZ]	Stripping tools

2. Removing

Move the front seats as far back as possible.

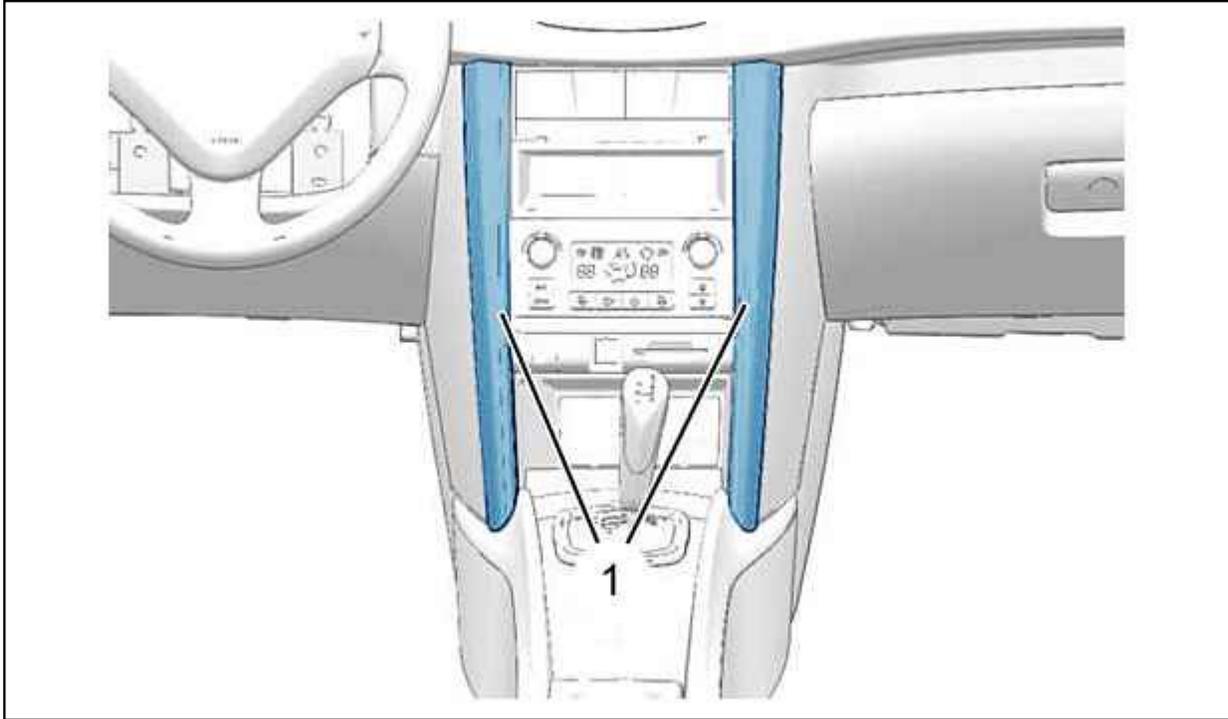


Figure : C5FG0JOD

Unclip the trims (1) ; Using tool [1350-ZZ].

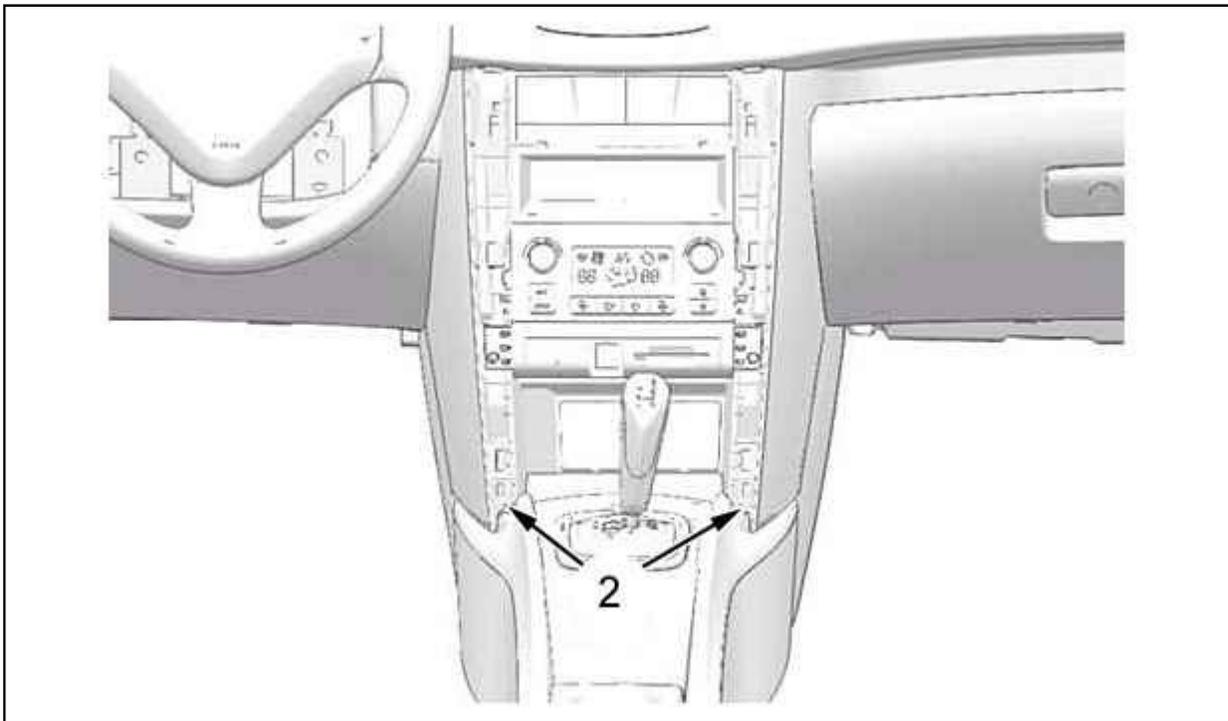


Figure : C5FG0JPD

Remove the bolts (2).

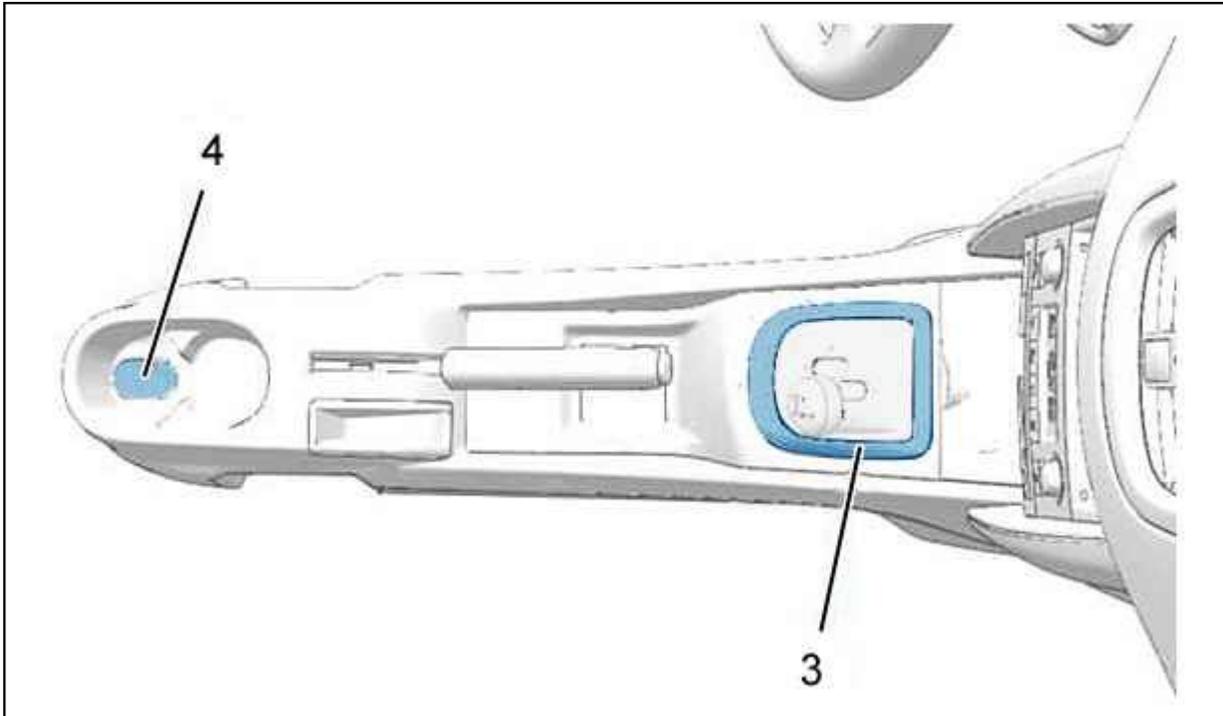


Figure : C5FG0JQD

Unclip ; Using tool [1350-ZZ] :

- The gear lever base trim (3) (According to equipment)
- The cover (4)

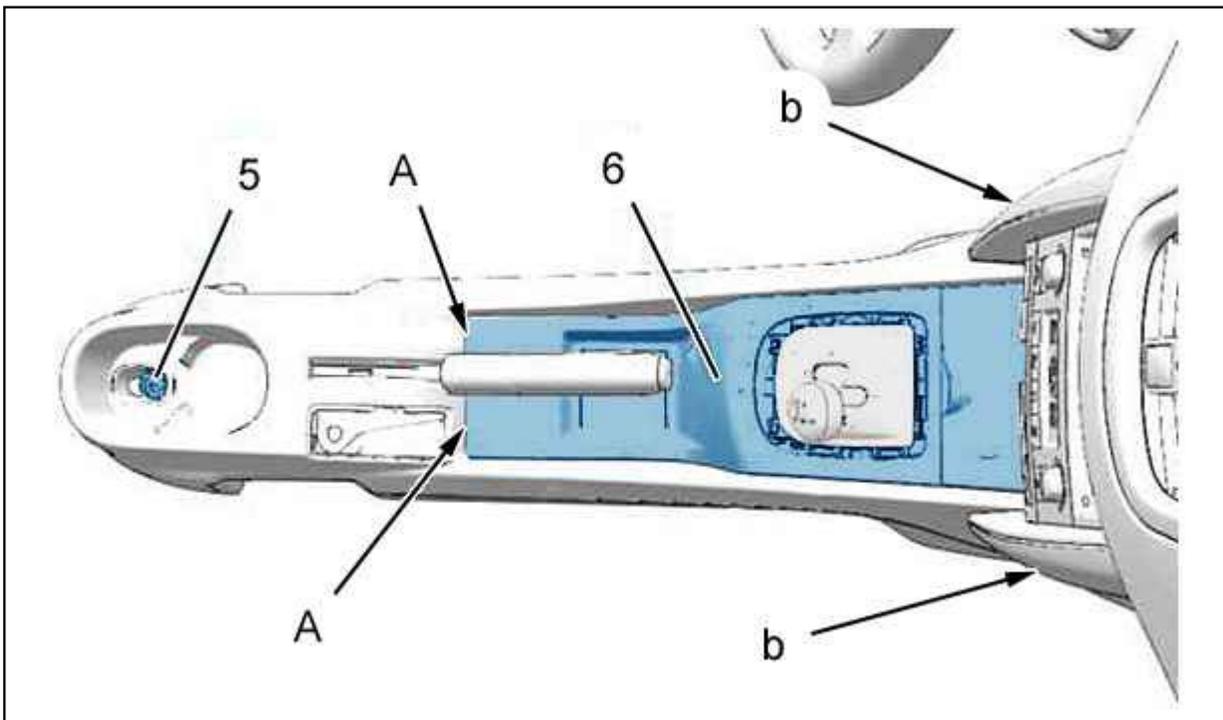


Figure : C5FG0JTD

Remove the nut (5).
Lift the handbrake lever.
Remove the ashtray.
Unclip the console cover (6) (as "A").
Disconnect the cigar lighter connector.
Remove the console cover (6).
Remove the clips (as "b").
Lower the handbrake lever .

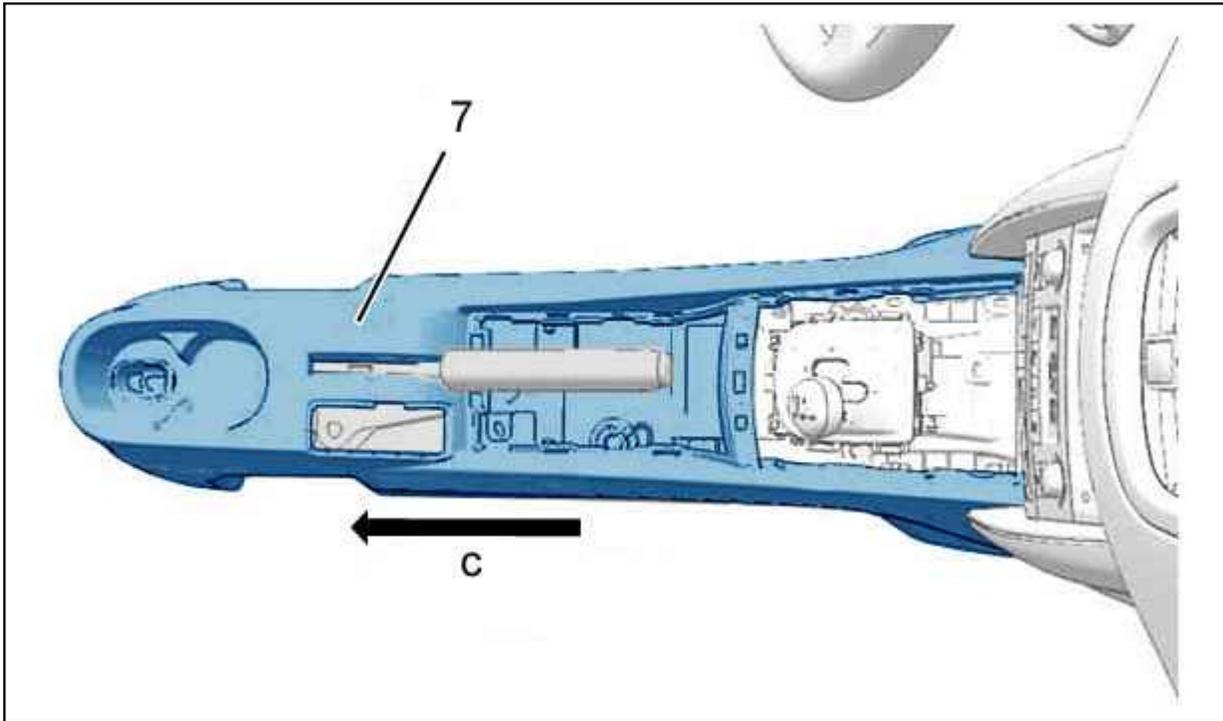


Figure : C5FG0JUD

Extract the centre console (7) (as "c").
Lift the front part of the centre console (7).
Remove the central console (7).

3. Refitting

Proceed in the reverse order to removal.
Tighten the nut (5) to 0,8 m.daN.
Check that the electrical equipment is working correctly.