

STRIPPING-ASSEMBLING : TAILGATE

FIXED ROOF OR SUNROOF CONCEALABLE OR WITH ROOF WINDOW

URGENT : Observe the safety and cleanliness recommendations ⓘ .

1. Tooling

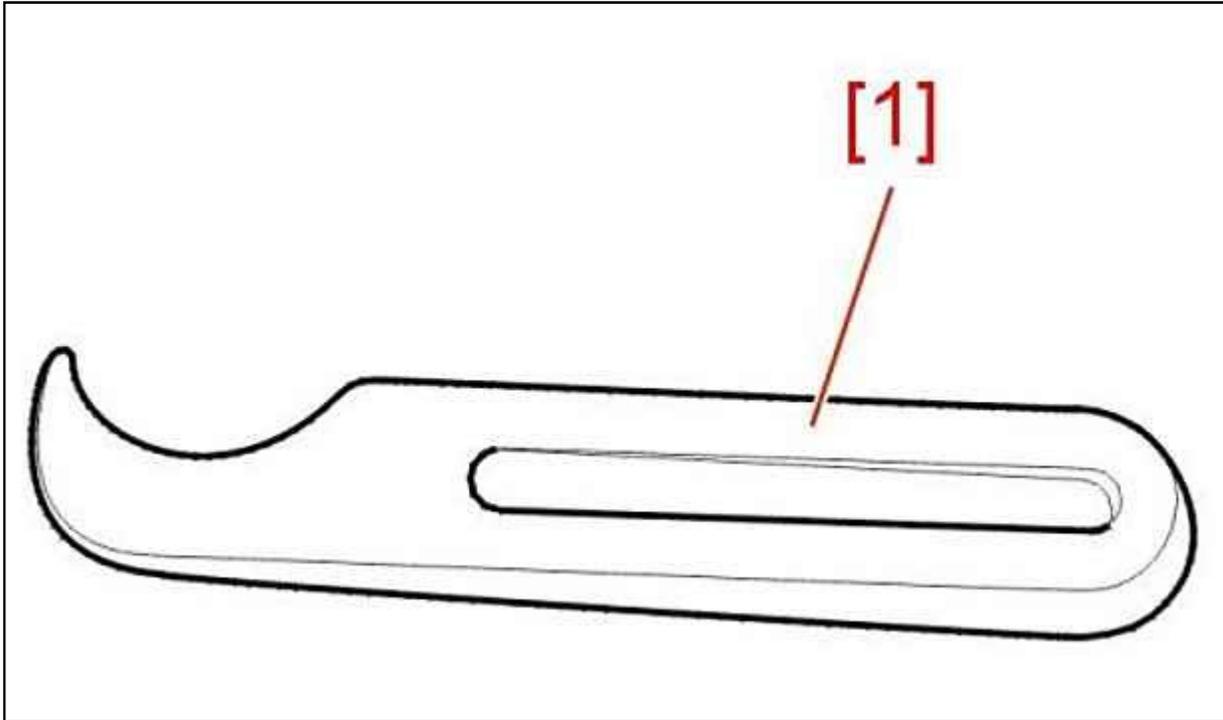


Figure : C4BK6CCD

[1] Spatula (-).1327.

2. Removing

Disconnect the battery.

Remove :

- **The additional brake light** ⓘ
- The wiper arm (Rear)
- The badges
- Number plate

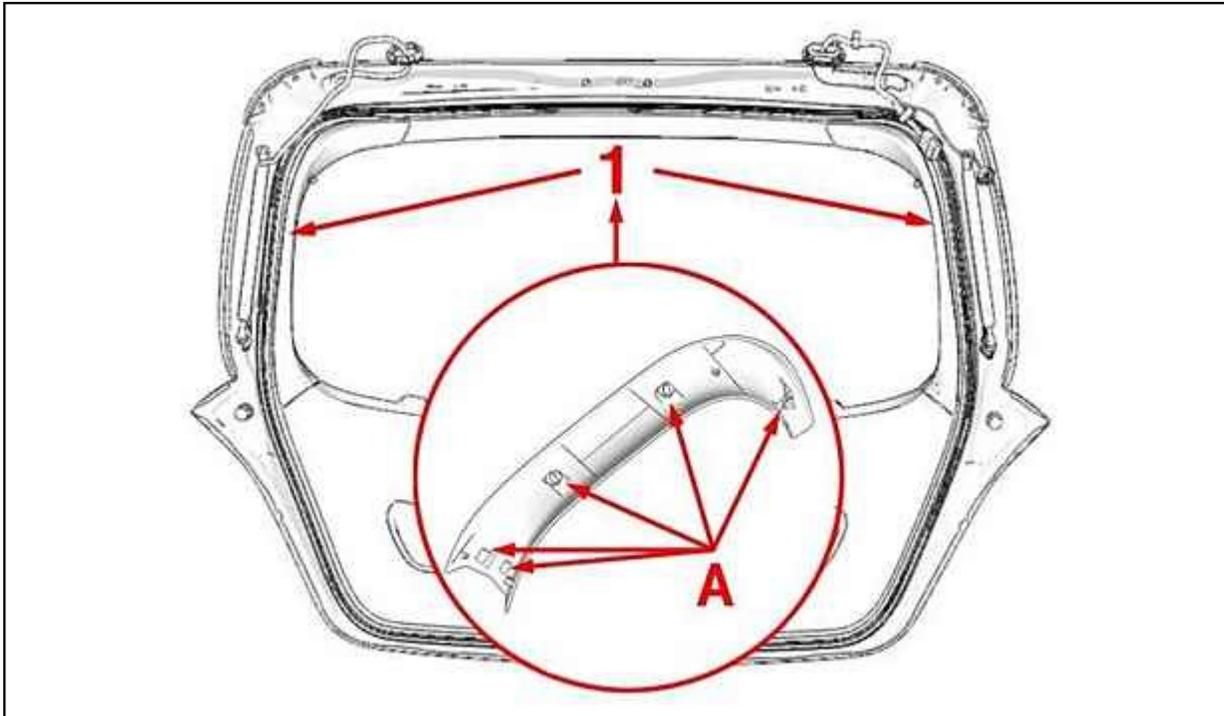


Figure : C4BK6HTD

Unclip the tailgate pillar (1) trims (en "A") ; Using tool [1].
Remove the trims (1).

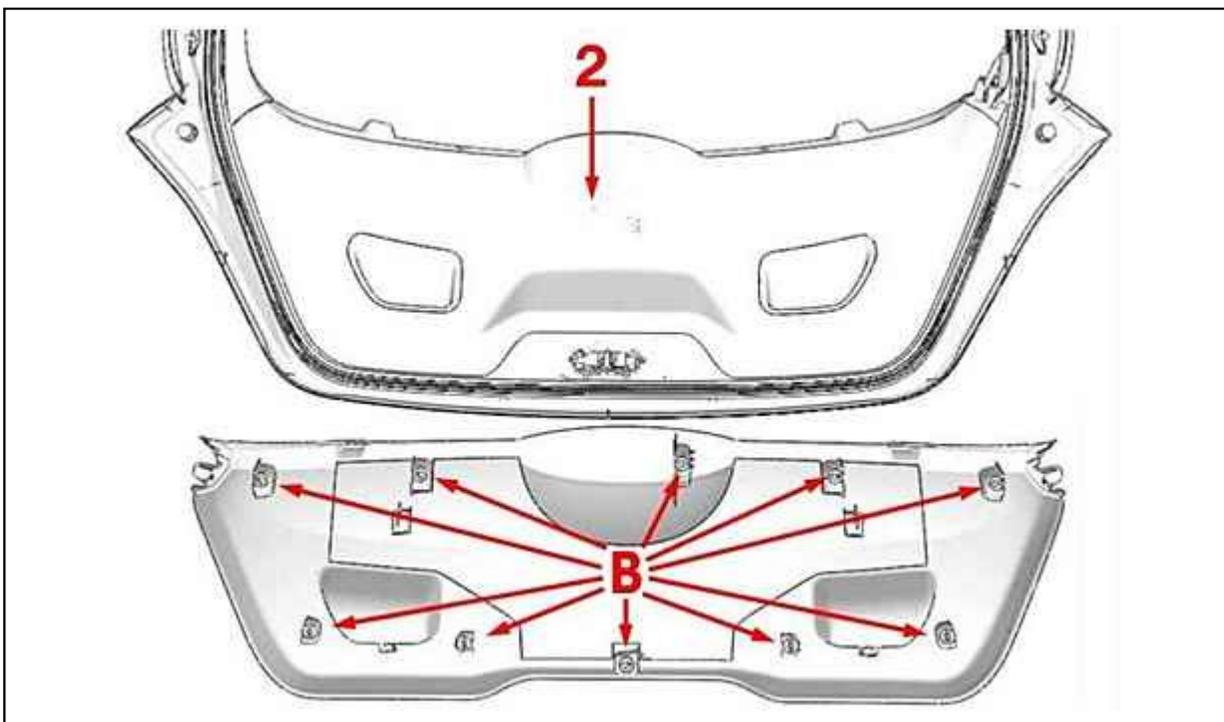


Figure : C4BK6HUD

Unclip the tailgate trim (2) (as "B") ; Using tool [1].
Remove the tailgate trim (2).

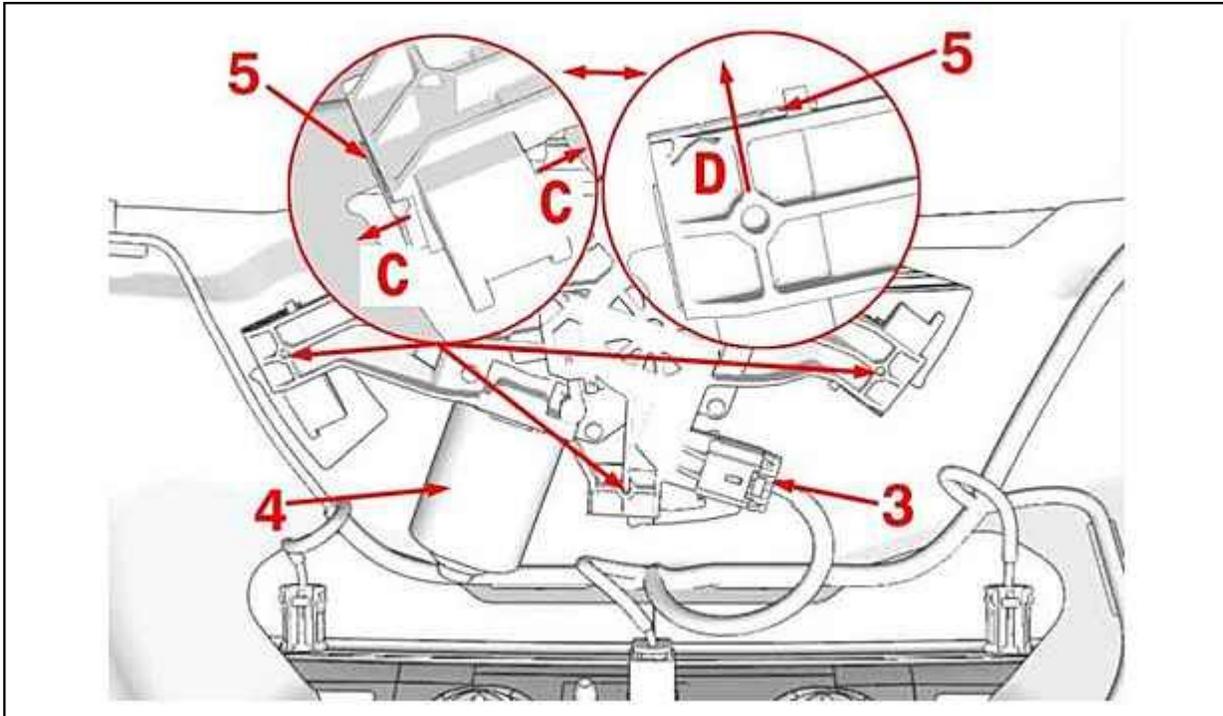


Figure : C4BK6HVD

Disconnect the connector (3) from the windscreen wiper motor (4).
 Release the clipping (5) pulling at the same time ; By means of a screwdriver (At "C", "D").
 Repeat the operation for the other fixings.

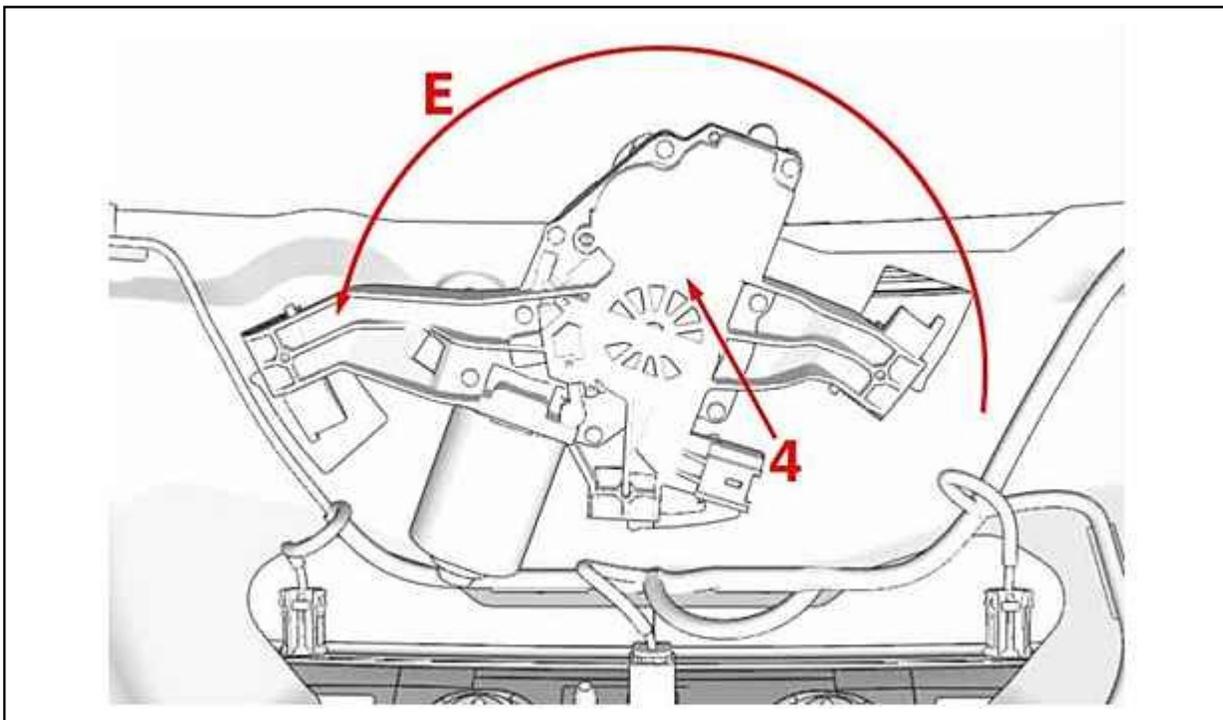


Figure : C4BK6HWD

Pivot the wiper motor (4) (At "E").

Detach and remove : The windscreen wiper motor (4).

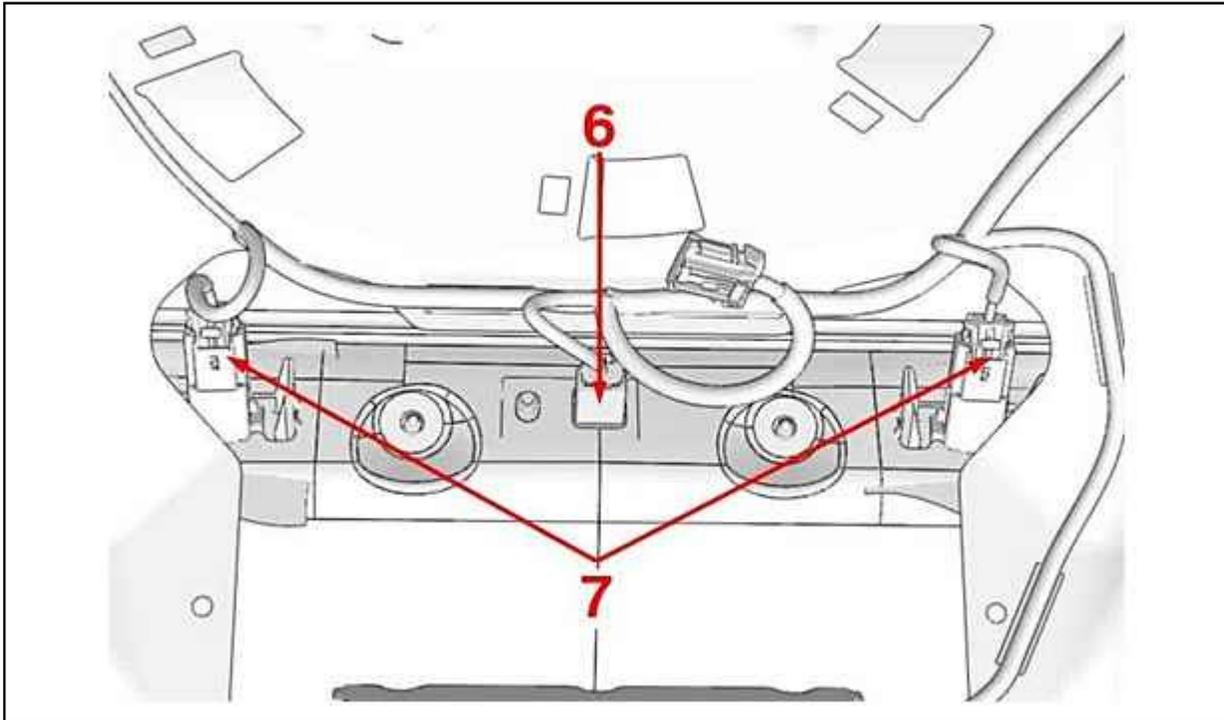


Figure : C4BK6HxD

Disconnect :

- The tailgate opening handle (6) connector
- The number plate lamp (7) connectors

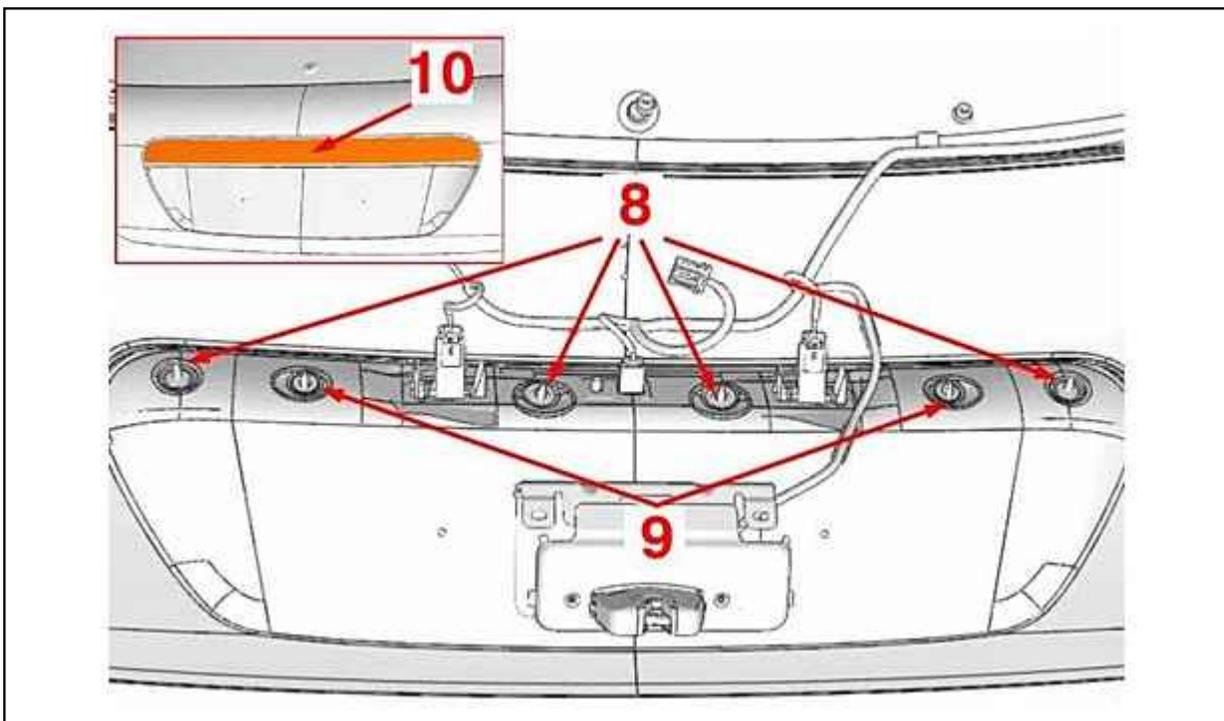


Figure : C4BK6HYD

Remove the mountings (8) (Number plate light trim (10)).

Unclip : The clips (9) (Number plate light trim (10)).

Remove : The registration plate lights finisher (10).

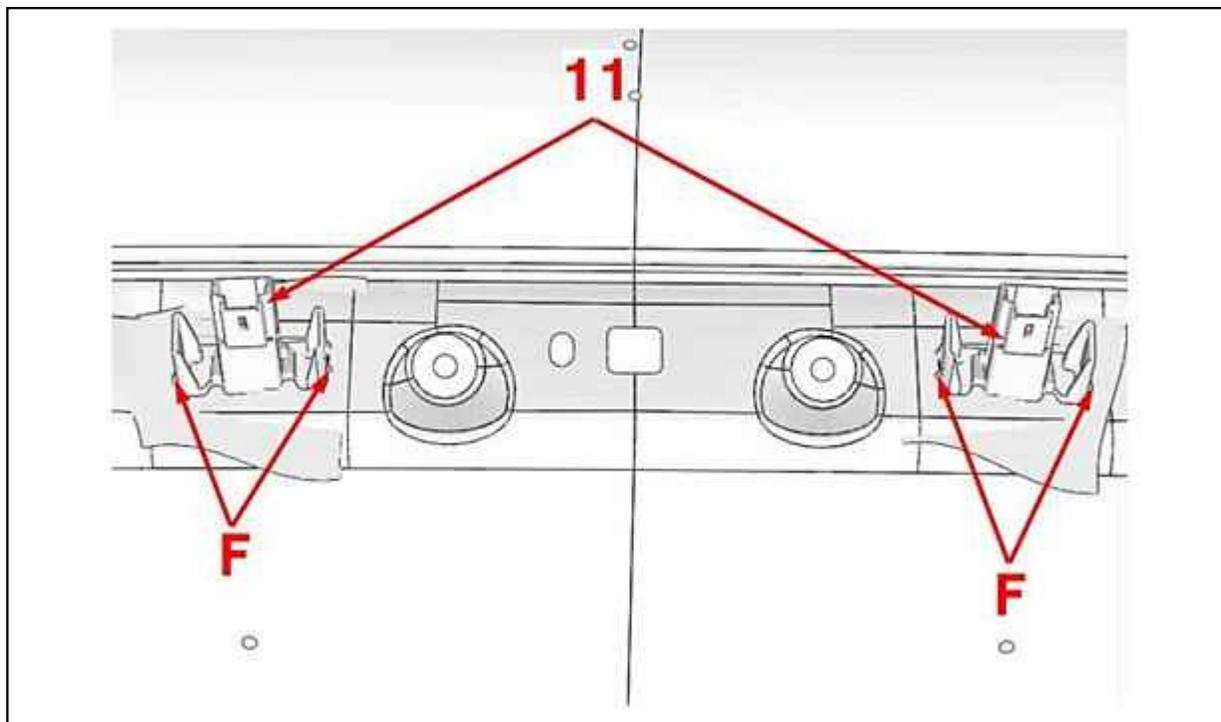


Figure : C4BK6HZD

Unclip : The number plate lamps (11) (as "F").

Remove : The number plate lamps (11).

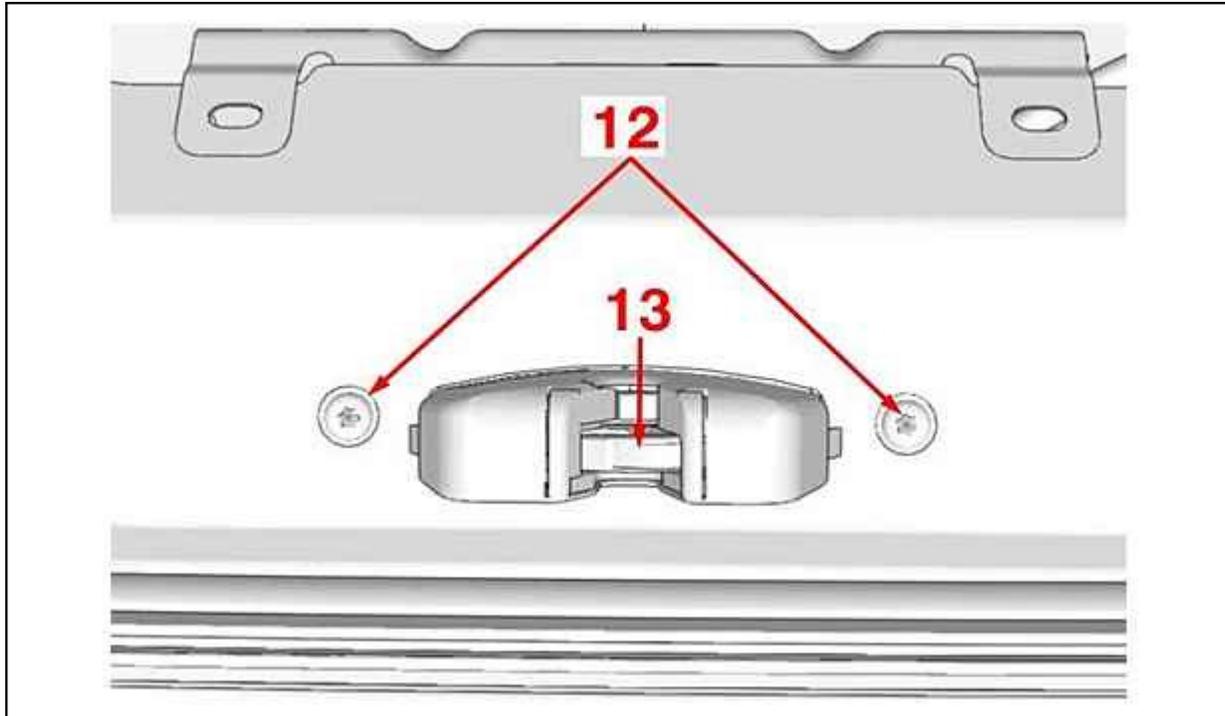


Figure : C4BK6J0D

Remove the tailgate lock (12) fixings (13).

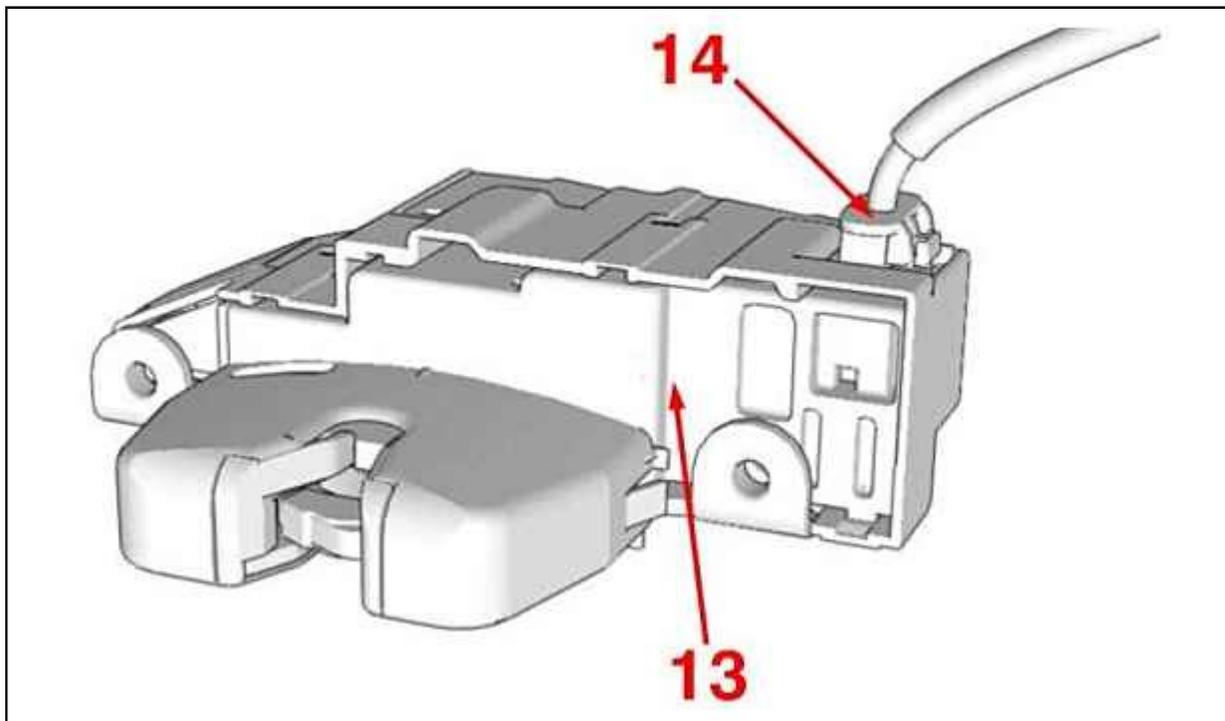


Figure : C4BK6J1D

Detach the tailgate lock (13).
 Disconnect the connector (14) .
 Remove the lock (13).

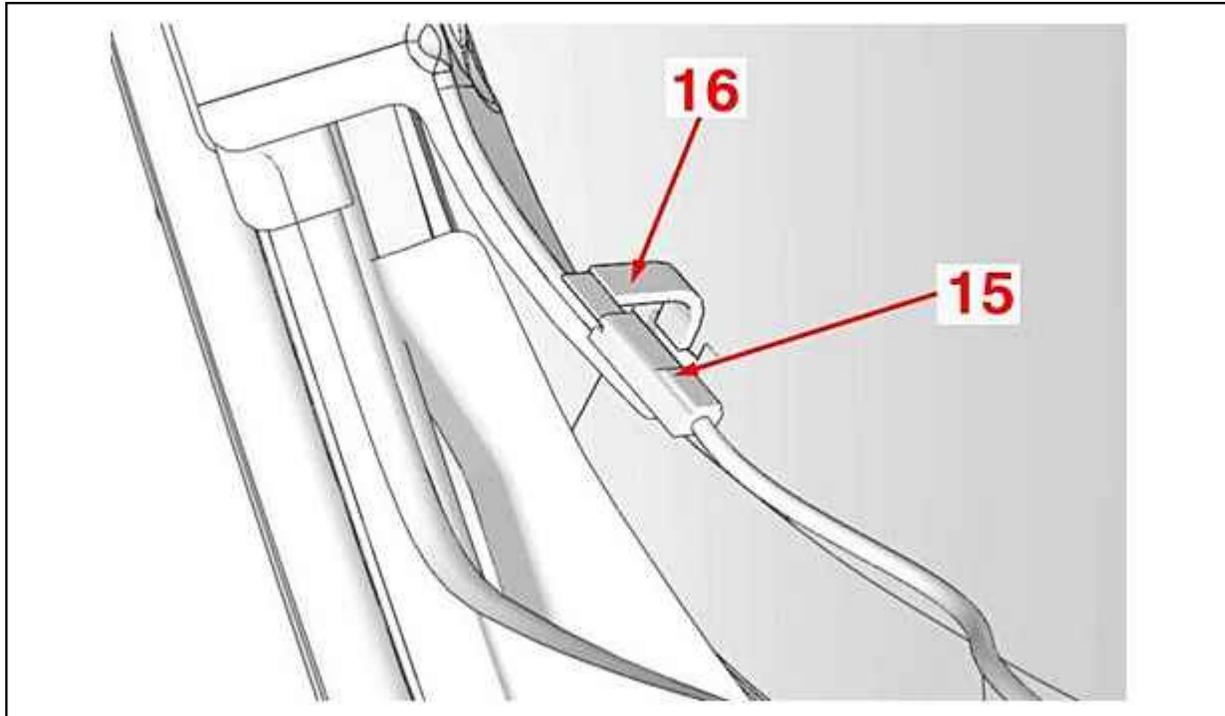


Figure : C4BK6J2D

Unplug : The rear screen demisting connectors (15) (16) (each side) .

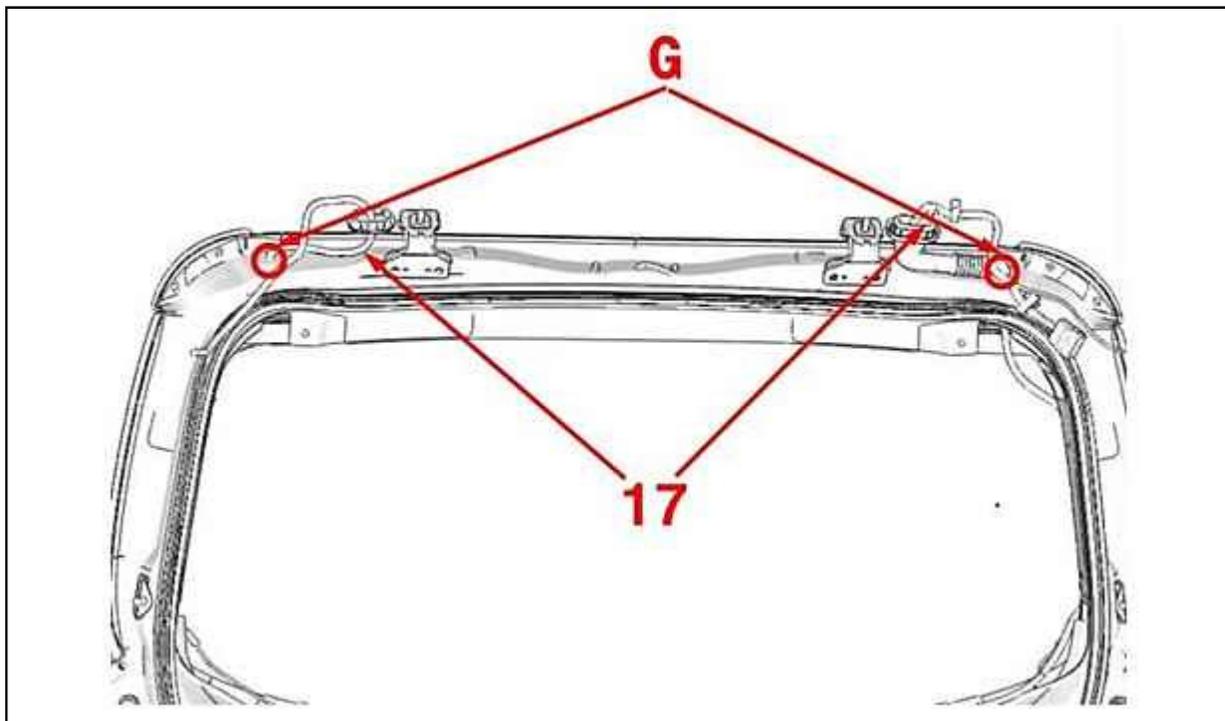


Figure : C4BK6J3D

Detach the harnesses (17) through the holes (as "G") .

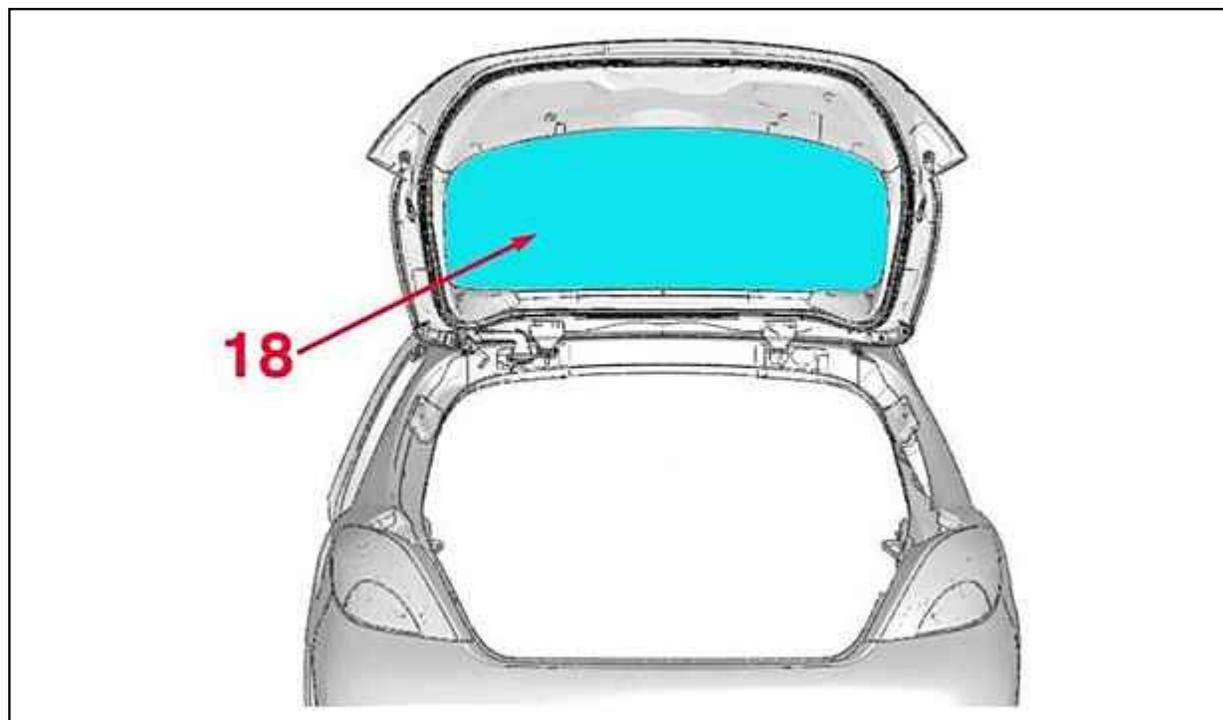


Figure : C4BK6J4D

Remove :

- **The tailgate glass (18)** 
- **Tailgate** 

3. Refitting

Proceed in the reverse order to removal.

Tighten the fixings (12) to 0,8 mdaN.

Re-initialise all the electronic components.

Check that the electrical equipment operates correctly.